




# United Security Products, Inc.

## AD-2001

Automatic Voice/Pager Dialer

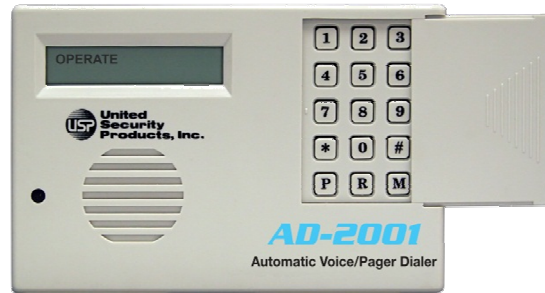

The AD-2001 dialer features busy-line and no-answer detection to ensure prompt transmission of up to 2 prerecorded messages delivered sequentially to as many as 4 standard telephones, cellular phones, voice and/or numeric pagers. Messages to both local and long-distance calls can be transmitted. When activated, the dialer instantly begins calling the numbers in sequence, delivering each message 1 to 3 times in a row, in accordance with the preselected number of dialing attempts.

The AD-2001 is extensively programmable, offering personalized customization to fulfill virtually any residential or business requirement. Plain-English prompts walk the user through the process in a timely manner.

Installation and hookup are quick and easy, whether installed in conjunction with normally open, normally closed, or dry contact or voltage activation sensors. The unit can also function as a stand-alone device, by simple connection to an ordinary telephone jack.

### Applications

- Security/burglar/fire alarm notification
- Equipment malfunction notification
- Environmental warning notification
- High/Low Temperature threshold notification

### Features

- A Full Featured Security System with 2 Independent Voice Message Dialer Channels
- 2 Separate Outgoing Messages
- Automatically Calls up to 4 telephones or cell phones
- Listen-In verification & 2-way communication
- Built-in Line Seizure
- EEPROM Memory retains program despite power loss
- Remote reset feature allows termination of activated channel
- NOTE: Power Supply Sold Separately

### Specifications

**Power source:** 9-18VDC

**Current (OPERATE mode - standby):** 28mA typical.

**Current (OPERATE mode - dialing):** 100mA max.

**Activation:**

- 1) N.C. Activation: dialer activates when an "open" is detected
- 2) N.O. Activation: dialer activates when a "close" is detected
- 3) Voltage Activation:  
N.C. (applied voltage: Min. +5VDC, Max. +28VDC)  
N.O. (loss of continuous voltage: Min. 0VDC, Max. 0.25VDC)

**Max. Digits for outgoing numbers:** 50

**Operating temperature range:** -18 to 55 C (0 to 130 F)

**Dimensions (inches):** 6x4x1.5in

**Weight (ounces):** 10 oz

**Mounting:** Wall or Flat Surface

**Case Material:** ABS

**Color:** White

**Warranty:** 1 Year

### Voice/Pager Dialers

United Security Products

Automatic Voice Dialers are a NEW GENERATION of Security Communications and Notification equipment for the Security Professional. Small, Compact and User Friendly. USP Dialers deliver the most advanced technology in the World today. Available in Models ranging from single to 4 alarm zones. USP Dialers deliver voice and numeric messages to landline phones or cell phones in any language up to 8 numbers

### About USP

United Security Products, Inc. has supplied quality products to the security alarm industry for over 40 years, with proven performance in more than 100 million installations. Security systems dealers rely on USP for the most innovative products in the security industry. For your next installation, be sure to specify USP products.

